

TERMINATION PROCEDURE

LIGHTCON™ SC 2-PART ADHESIVE CONNECTOR (AINFO-0007)

I INTRODUCTION

This termination procedure is prepared for the LightCon™ SC Connectors. Please read this procedure thoroughly before starting assembly. All tools and materials required are listed in Section III.

II DESCRIPTION

Fig. 1 shows the structure of the LightCon™ SC Connector, consisting of Connector Housing, Connector Body, Crimp Sleeve, Boots, Dust Cap, and Spacer. Connectors for different cables/fibers may vary slightly by boots or crimp sleeves. Follow the steps below to make cable assembly.

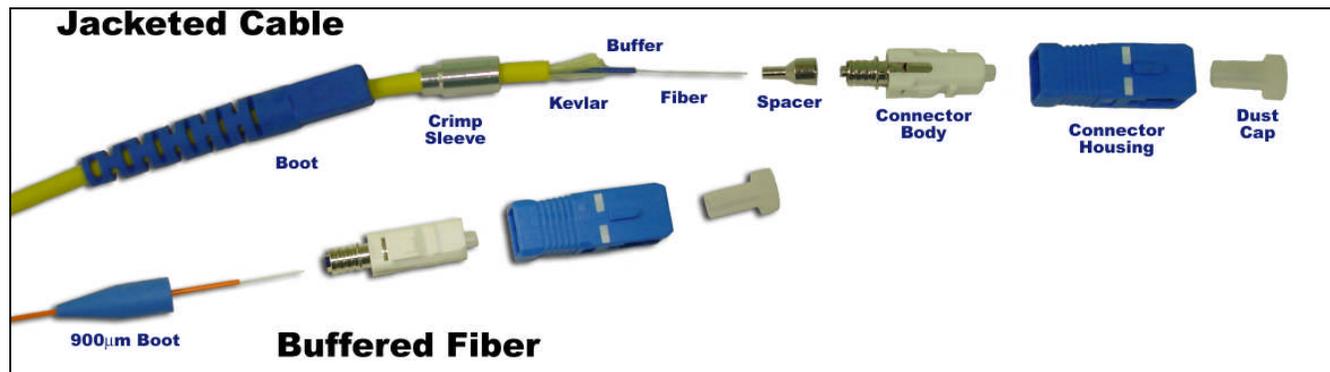


Fig 1

Step 1 Slide the Boot and Crimp Sleeve onto the Cable as shown in Figure 1.

Note: Do not use Crimp Sleeve and boot for buffer fiber type. Use 900um type boot instead.

Step 2 Mark and strip the fiber using SC Strip Template for correct dimensions. Use the Strip Tool to remove the cable jacket and cut the strength members (Kevlar) with the Kevlar Scissors.

Step 3 Insert the Spacer carefully onto the buffer of the cable and push the Spacer all the way until it stops flaring out the strength members.

Step 4 Use the Strip Tool to remove the required length of buffer. Use alcohol and a lint-free wipe to clean the bare fiber.

Step 5 Remove the caps from the bottles of QuickGlass™ Primer and QuickGlass™ Adhesive. Place a needle tip on the adhesive bottle. Use a needle tip to puncture a hole in the top of the primer bottle.

Step 6 Insert the syringe tip into the rear of the connector until it bottoms with the ceramic ferrule.

Step 7 Apply primer on the bare fiber with a syringe and needle.

Step 8 Insert the bare fiber carefully into the adhesive-filled connector. Slightly rotating the connector will help the fiber to pass through the ferrule easier.

Note: (1) The 900um buffer must bottom with the ferrule inside the connector.

Step 9 Slide the Crimp Sleeve over the Kevlar and connector body. Crimp the Crimp Sleeve twice with the crimping tool. Crimp the large end of the crimp sleeve with the .178" die cavity. Crimp the small end of the crimp sleeve with the .128 die cavity.

Note: (a) In case of Buffered Fiber termination, skip this step.

(b) Use die cavity 0.128"/3.25mm when a 2mm Crimp sleeve is applied.

Step 10 Slide the boot over the crimped sleeve.

Step 11 Allow 30-60 seconds for adhesive to cure.

Step 12 Use the fiber scribe to cleave the protruded fiber at the point where the fiber and adhesive bead meet. Gently pull the fiber until the fiber separates.

Note: (a) Cleave again if fiber does not pull away easily.

Step 13 Use a wipe dampened with alcohol to clean the polishing pad and polishing tool. Place the 5µm polishing film on the polishing pad. Place the polishing tool on the 5µm film. Put the connector into polishing fixture and polish.

Note: Polishing Machine manufacturers offer different polishing procedures. Please refer to the polisher manuals for proper polishing process. This polishing procedure is for reference only.

Step 14 Polish the end of the connector by applying light pressure on the connector and move the polishing fixture in a Figure-8 motion until the polishing traces caused by protruded fiber to disappear.

Step 15 Repeat the previous step with 1µm and 0.1µm polishing film respectively.

Step 16 Clean the connector end and use a microscope to inspect the end-face of the connector. No adhesive, crack or scratch should be visible.

Step 17 Pull the connector housing over the connector body and make sure it snaps in place.

Step 18 Clean the connector end-face with an alcohol dampened wipe. Install dust cap.

American Fiber Optic Technologies, LLC

2428 Bowland Parkway, Suite 103

Virginia Beach, VA 23454

703.306.3305 phone

703.306.3309 fax

www.americanfo.com